


AKTISIL AM

TECHNICAL DATA SHEET - Field of application: ELASTOMERS

1. Description	2. Applications	3. Benefits
<p>AKTISIL AM is an activated SILLITIN Z 86, produced by modifying the surface with amino functional silane. The by-products split off during the treatment reaction are largely removed during the production process which firmly attaches the silane to the filler surface. This helps minimize undesirable side effects, as they are potentially encountered with in-situ mixing (direct addition of silane to the compound).</p> <p>During vulcanization, the amino groups of AKTISIL AM react in the presence of appropriate crosslinking agents with the polymer.</p> <p>In processing thermoplastic polymers, AKTISIL AM in the presence of appropriate functional groups will give rise to high bond strength via hydrogen bonds.</p> <p>Characteristics: Appearance: free-flowing powder Brightness Y DIN 53 163: 82 Brightness Z DIN 53 163: 77 Volatile matter at 105 °C: 0.2 % Density: 2.6 g/cm³ Particle size distribution d₅₀: 2.2 µm d₉₇: 10.0 µm Sieve residue >40 µm: 30 mg/kg Oil absorption: 45 g/100 g</p> <p>Packaging: Paper bags: à 25 kg PE bags: ≤ 25 kg EVA bags: ≤ 20 kg Big Bags: 550 - 900 kg</p> <p>Shelf life: At least 2 years if properly stored under dry conditions.</p>	<p>In elastomer applications AKTISIL AM can be used as a functional filler either on its own or in combination with other non-reinforcing or reinforcing fillers. An optimum effect will be obtained in polar elastomers in combination with sulfur or sulfur donor crosslinking systems, including the amine crosslinking of BIIR.</p> <p>AKTISIL AM can also interact with the polar groups of polymers via hydrogen bonds in thermoplastic compounds, e. g. based on EVM (EVA). The product can also be used in the polyol component of elastomeric PU resp. TPU compounds as a mineral additive.</p> <p>It can be used whenever high tensile strength and high modulus, combined with a very low tensile and compression set, are as important as excellent processing and extrusion properties.</p> <p>These properties are an ideal combination, particularly for pressure-less cured extruded products and sponge rubber.</p> <p>Fields of application:</p> <ul style="list-style-type: none">• pressure-less cured extruded products (profiles, hoses)• cable sheaths and cable insulation• pharmaceutical stoppers• molded products and seals• roller coverings• sponge rubber products <p>Methods of processing: Any process commonly used in the rubber industry.</p> <p>Elastomers: CR, NBR, HNBR, IIR, BIIR, CIIR; EVM, EVA, AEM; CM, CSM, ECO, ACM, EPDM, U / PU / TPU</p> <p>Metering: TPU: approx. 5 % in polyol all others: 50 – 300 phr</p>	<p>The excellent properties of the base material SILLITIN Z 86 are retained:</p> <ul style="list-style-type: none">• good, fast incorporation• very good dispersion behavior• good rheological properties• excellent surfaces• very good extrusion properties• good heat conductivity• no negative influence on curing rate• low tensile and compression set• high electric insulation resistance• good aging properties• high chemical resistance• matting effect <p>AKTISIL AM also provides the following benefits compared with the base SILLITIN Z 86:</p> <ul style="list-style-type: none">• no negative effect on amine cure (BIIR)• increased tensile strength• maximum tensile strength combined with a higher level of filling• increase in modulus• reduced tension and compression set• reduced abrasion loss• improved resistance to liquids

VM-0/12.08/Art.-No. 06583980

4. Reactions at HOFFMANN MINERAL (model)

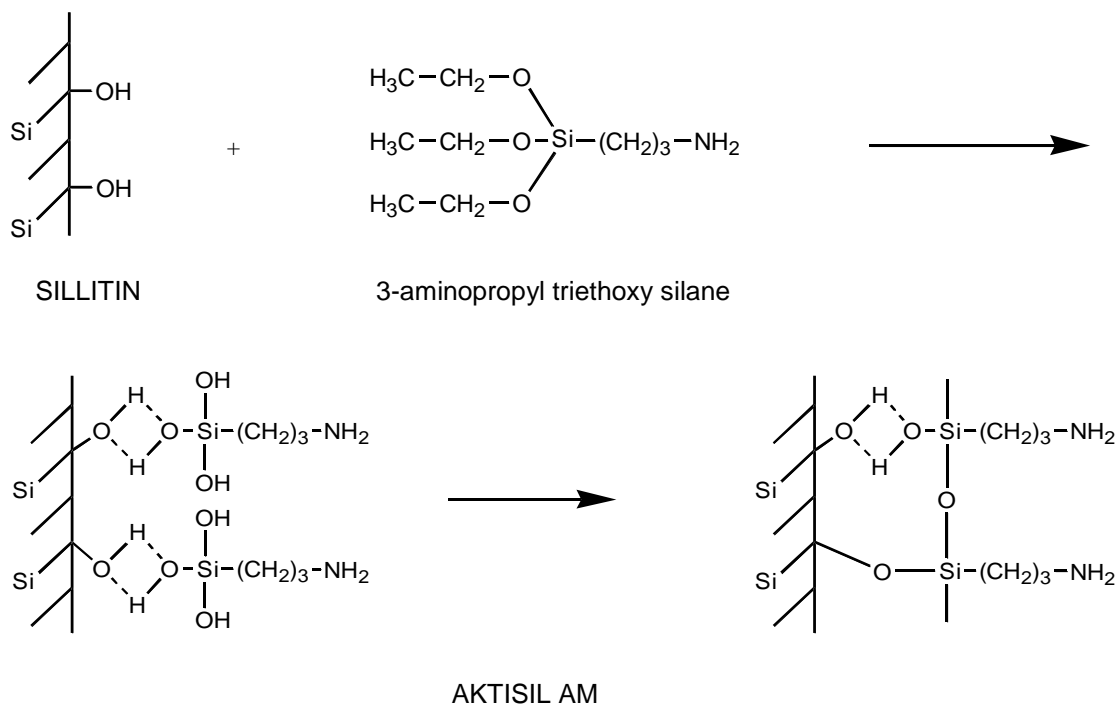

5. Possible reactions at user's plant (model)

