

AKTISIL MAM

Field of application: Elastomers

1. Description

AKTISIL MAM is an activated SILLITIN V 88, produced by modifying the surface with a methacrylic functional group. The by-products split off during the treatment reaction are largely removed during the production process which firmly attaches the functional group to the filler surface. This helps minimize undesirable side effects, as they are potentially encountered with in-situ mixing (direct addition of additive to the compound).

During vulcanization the methacryl groups of the AKTISIL MAM react in the presence of radicals with the polymer.

Characteristics

| | | |
|----------------------------|-----------------|-----------------------|
| Appearance | | free-flowing powder |
| Color CIELAB scale: | L* | 95.1 |
| | a* | 0.3 |
| | b* | 4.0 |
| Volatile matter at 105 °C | | 0.2 % |
| Density | | 2.6 g/cm ³ |
| Particle size distribution | D ₅₀ | 4.0 µm |
| | D ₉₇ | 18.0 µm |
| Oil absorption | | 45 g/100 g |

Packaging

| | |
|------------|--------------|
| Paper bags | á 25 kg |
| EVA bags | ≤ 20 kg |
| Big Bags | 550 - 900 kg |

Shelf life

2 years if stored properly under dry conditions.



2. Applications

In elastomer applications AKTISIL MAM can be used as a functional filler either on its own or in combination with other non-reinforcing or reinforcing fillers. The best effect is achieved in radical cured systems (peroxide, high energy radiation).

It can be used whenever high tensile strength and high modulus, combined with a very low tensile and compression set, are as important as excellent processing and rheological properties.

It is particularly suitable for white and very bright compounds.

These properties are an ideal combination, particularly for white or bright molded products with extremely high requirements in terms of tensile and compression set.

Fields of application

- molded products and seals
- roller coverings
- silicone rubber products
- condenser seals (IIR resin-crosslinked)

Methods of processing:

Any process commonly used in the rubber industry, particularly for molded products and calender products.

Elastomers:

Radical cured elastomers such as CM, CSM, EPM, EPDM, EVM, HNBR, pre-crosslinked or resin-crosslinked IIR; Q.

Metering:

| | |
|----------------------|--------------|
| EPM, EPDM: | 50 - 250 phr |
| EVM: | 50 - 250 phr |
| CM: | 50 - 250 phr |
| HNBR: | 30 - 150 phr |
| Pre-crosslinked IIR: | 50 - 150 phr |
| Q: | 50 - 150 phr |



3. Benefits


The excellent properties of the base material SILLITIN V 88 are retained:

- good, fast incorporation
- very good dispersion behavior
- very good rheological properties
- excellent surfaces
- good extrusion properties
- good heat conductivity
- no negative influence on curing rate
- very low tensile and compression set
- high electric insulation resistance
- good aging properties
- high chemical resistance
- matting effect

AKTISIL MAM also provides the following benefits compared with the base SILLITIN V 88:

- increased tensile strength
- maximum tensile strength combined with a higher level of filling
- increase in modulus
- reduced tensile and compression set
- reduced abrasion
- improved resistance to liquids
- electric insulation resistance remains high and constant after storage in water

4. Possible reaction during vulcanization at user's plant (model)

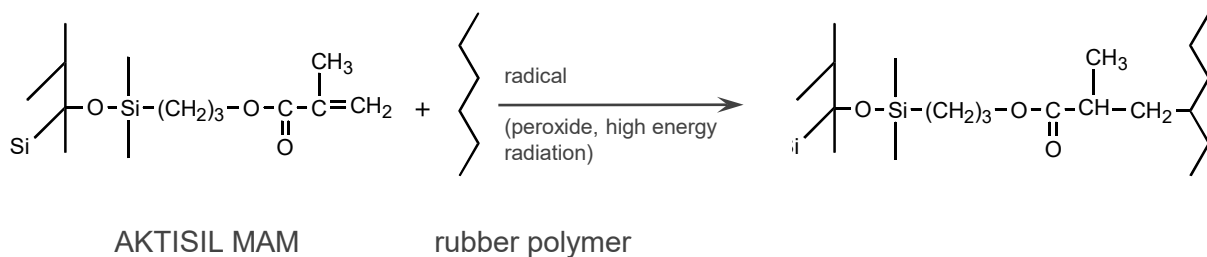

Our applications engineering advice and the information contained in this memorandum are based on experience and are made to the best of our knowledge and belief, they must be regarded however as non-binding advice without guarantee. Working and employment conditions over which we have no control exclude any damage claim arising from the use of our data and recommendations. Furthermore we cannot assume any responsibility for patent infringements, which might result from the use of our information.