



SILLIKOLLOID P 87 (PURISS)

Field of application: Elastomers

1. Description

SILLIKOLLOID P 87 and SILLIKOLLOID P 87 puriss is a natural combination of corpuscular silica and lamellar kaolinite. These two elements together form a loose structure which offers particular advantages in terms of application possibilities when used as a functional filler.

Characteristics

| | | |
|--|------------------------------------|-----------------------|
| Appearance | | free-flowing powder |
| Color CIELAB scale: | L* a* b* | 94.4 0.8 8.7 |
| Residue > 40 µm | | 20 mg/kg |
| Volatile matter at 105 °C | | 0.5 % |
| Density | | 2.6 g/cm ³ |
| Particle size distribution | D ₅₀ D ₉₇ | 1.5 µm 6.0 µm |
| Surface area BET | | 14 m ² /g |
| Oil absorption | | 55 g/100 g |
| Puriss grade: As a result of a sophisticated manufacturing process the very low residue is reduced even further from the values given above to the following: In addition the good dispersion behavior is once more improved. | > 40 µm | 8 mg/kg |

Packaging

| | |
|------------|--------------|
| Paper bags | á 25 kg |
| EVA bags | ≤ 15 kg |
| Big Bags | 550 - 900 kg |
| Bulk | ≤ 22 t |

The puriss-grade is available in paper bags of 20 kilos only.

Shelf life

Unlimited if stored properly under dry conditions.



2. Applications

In elastomer applications SILLIKOLLOID P 87 and SILLIKOLLOID P 87 puriss can be used as a functional filler either on its own or in combination with other non-reinforcing or reinforcing fillers.

Fields of application

In general **SILLIKOLLOID P 87** is suitable for any rubber products used for technical applications.

Its particular properties are high tensile strength, high tear resistance and excellent extrusion properties.

Used in black profiles and hoses it has a slight matting effect.

It is equally suitable for black and colored compounds.

SILLIKOLLOID P 87 puriss also has advantages in the following instances:

- products with extremely thin walls (membranes)
- if surface quality requirements are very high (roller coverings and offset blankets)
- if dispersion requirements are very high (compounds with a high oil content or automotive profiles with very high surface defect rate)

Methods of processing:

Any process commonly used in the rubber industry.

Elastomers:

BIIR, BR, CIIR, CR, HNBR, IIR, IR, NBR, NR, PNR, SBR;
CM, CSM, EPM, EPDM, EVM.

Metering:

EPM, EPDM: 50 - 400 phr

NBR: 50 - 250 phr

NR: 50 - 250 phr

SBR: 50 - 250 phr

Comment:

In the case of high-filled peroxide cured compounds it may be beneficial to add glycol.



3. Benefits

- good, fast incorporation
- good dispersion behavior
- good rheological properties
- excellent surfaces
- excellent extrusion properties
- good heat conductivity
- no negative influence on curing rate
- low tensile and compression set
- high electric insulation resistance
- good aging properties
- high chemical resistance
- complies with the standards on basic foodstuffs of the BfR and FDA
- matting effect

Puriss also provides benefits compared with the base material SILLIKOLLOID P 87:

- extremely low sieving residue
- excellent dispersion behavior, even in critical compounds

Comparison of properties

| | SILLITIN V | SILLITIN N | SILLITIN Z | SILLIKOLLOID P |
|--------------------------------|---------------|---------------|---------------|-------------------|
| Viscosity | • | •• | ••• | •••• |
| Tensile strength | • | •• | ••• | •••• |
| Tear resistance | • | •• | ••• | •••• |
| Compression set | • | •• | ••• | •••• |
| Profile quality (Extrusion) | • | •• | ••• | •••• |
| Matting effect (Extrusion) | •••• | ••• | •• | • |
| Elasticity | •••• | ••• | •• | • |
| Abrasion | •••• | ••• | •• | • |

• = low •••• = high




4. Particle size distribution

The measurement method for these particle size distributions is based on the Fraunhofer diffraction spectrum. The analyses were carried out with Mastersizer 3000, a laser apparatus of Malvern.

Important:

The data on particle size distribution is highly dependent upon the method used, test preparations and the measuring device itself. As a result the values given may not be directly comparable with those provided by another manufacturer.

If you have any queries please contact us direct.

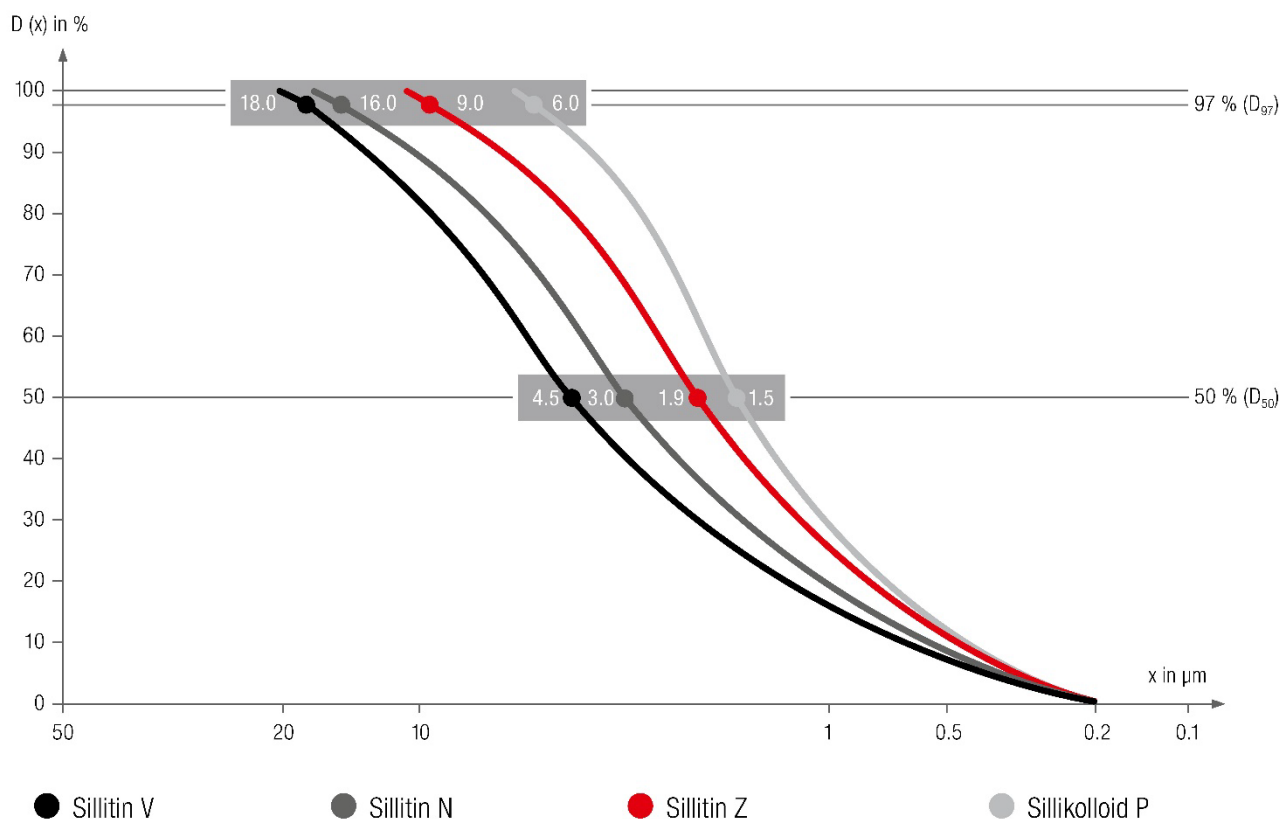

Our applications engineering advice and the information contained in this memorandum are based on experience and are made to the best of our knowledge and belief, they must be regarded however as non-binding advice without guarantee. Working and employment conditions over which we have no control exclude any damage claim arising from the use of our data and recommendations. Furthermore we cannot assume any responsibility for patent infringements, which might result from the use of our information.